




**NEW
PRODUCT**

LFT-5M

Portable Lifter

BENEFITS

- Robust construction: made of steel and aluminium for lightweight and stability (only 36 kg without platform)
- Steel cables within steel structure for increased safety
- Remote control 6 m
- Practical transport roller and handle: Facilitates easy on-site transportation

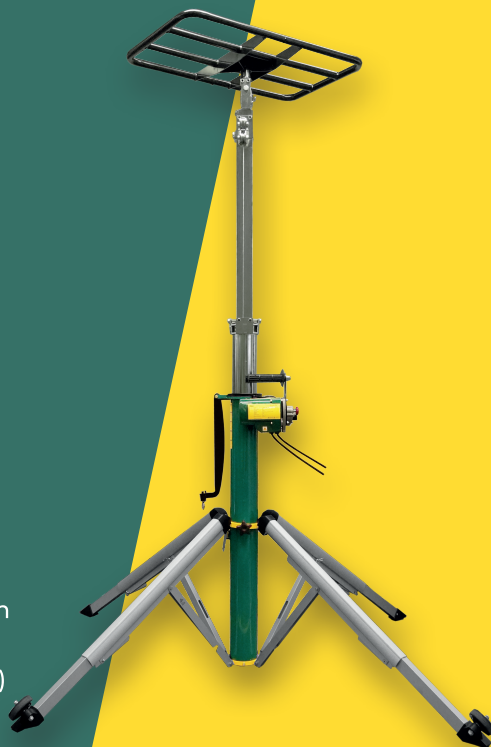

Part No
4689022

DISCOVER
THE PRODUCT
ONLINE



REFCO Manufacturing Ltd.
Hitzkirch – Switzerland

Acknowledged globally



DATA SHEET

Property	Value
Voltage	230 V
Frequency	50 Hz / 60 Hz
Current	4 A
Ingress protection	IP43
Capacity	3 m: 140 kg (9.9 ft: 309 lb) 4 m: 120 kg (13.1 ft: 265 lb) 5 m: 90 kg (16.4 ft: 198 lb)
Maximum lift	5.05 m (16.6 ft)
Platform dimension	775 x 460 x 50 mm (30.5 x 18.1 x 2")
Lifter weight (without platform)	36 kg (79 lb)
Platform weight	5 kg (11 lb)
Ambient temperature range	-5°C – 45°C (23 °F – 113 °F)
Storage temperature range	-5 °C – 45 °C (23 °F – 113 °F)